



Wireless Microphone Operation:

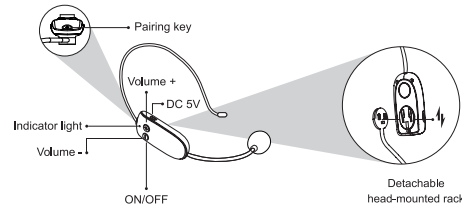

1. The wireless microphone factory setting have been paired successfully, you can use it directly. If the microphone has no sound or the microphone is disconnected, you need to manually pair it.

Turn on the amplifier and wireless microphone.



Step1.
Long press the "M" key on the voice amplifier.
Voice prompts:UHF is waiting for connection.



Step2.
Long press the wireless microphone "M" key for 5 seconds.
Voice prompts:UHF is connected.

2. Pair the UHF manually:

Step1. Turn on the amplifier , long press the " M " key to enter into UHF wireless pairing status, a voice prompt will say, " UHF is waiting for connection " .

Step2. Turn on the wireless microphone and long press " M " key for 5 seconds,a voice prompt will say, " UHF is connected " .

During the use of UHF wireless microphone amplification, long-pressing " M " will disconnect the connection. When you need to use UHF wireless microphone amplification again, you must re-pair according to the pairing method.

How to charge the wireless microphone:

When the microphone blue indicator light flashes means low battery. Please turn it off and charging through Micro USB with DC 5V adapter. The red indicator light will be on all the time when charging, and it will go out after fully charged.

Notes:

- The normal charge time is 2-3 hours. Unplug the charger as soon as it is fully charged.
- Full charge before first use of the microphone to ensure best results.
- Turn off the UHF wireless microphone when not in use.

Trouble shooting:

1. **Turn on the power switch, but the amplifier has no sound.**

- The indicator is not light: it means low power and you should charge the amplifier.
- Turn the volume up on the voice amplifier, and also on the microphone.

2. **Talk to the wireless microphone, but the amplifier has no sound.**

- Please confirm both voice amplifier and microphone is power on.
- Please confirm whether the wireless microphone has been paired with the amplifier successfully or not. Pair the UHF manually again if necessary.

3. **The voice amplifier has distinct howling.**

- Wear the microphones correctly: put the microphone in front of the mouth.
- In a small room, please turn down the volume properly to avoid howling.

Caution:

- Aim at the MIC capsule when speaking and keep the distance between voice amplifier and MIC longer than 2ft (60cm) avoid howling.
- No sound out from the speaker after the UHF Mic is paired. The connection between the microphone and the speaker may be disconnected.You should re-pair according to the pairing method.
- Don't insert or plug the connector frequently to avoid the looseness of socket or the bad connect.

- Recharge timely when battery power is low.
- Original accessories are suggested if they need to be replaced.
- Non-professional technician is not allowed to dismantle or repair the product please contact the local agent if there is any question or service requirement.
- The amplifier should be kept in dry and ventilated area, rain, water, thump should be avoided.
- Please keep the product and accessories far away from children.

Zoweetek Guarantee:

100% Zoweetek Guaranteed Product Satisfaction.

We promise 1 year warranty.

If you have any questions, please feel free to contact us, we will try our best to provide you the best service.

Technical support and troubleshooting

✉ support@zoweetek.cn


🌐 web: www.zoweetek.cn



ZOWEETEK

Natural Voice

Voice Amplifier User Manual

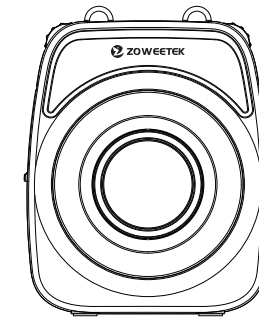

ZW-S93

正面

Zoweetek Voice Amplifier with UHF Wireless Microphone Headset.

Features:

- ZOWEETEK patented appearance.
- Stylish, ergonomic and comfortable design.
- 20W power output, sound to cover about 20000 sq.ft (2000 m²).
- Adopt ZOWEETEK Acoustic amplification electroacoustic system.
- Equipped with ZOWEETEK special acoustic microphone --- Hi Fi original sound amplification.
- Support Bluetooth, TF card, USB flash disk to play music.

Specification (Voice Amplifier):

Max output power:	20W	Frequency response:	80Hz-18KHz
Output Impedance:	4Ω	Work temperature:	-10°C-45°C
Charging voltage:	DC5V 500mA+	Amplify time:	8-12 hours
Charging time:	3-5hours	Music-play time:	6-8 hours

Wireless Microphone:

Charging time: 2-3 hours Using time: 2-4 hours

Quick Guide To Use The System


Please read the instructions carefully before using it. When turning on the voice amplifier, ensure that the MIC don't point at the amplifier, and keep the distance between the voice amplifier and the MIC more than 2ft to avoid howling.

UHF pairing randomly: Turn on the amplifier and the UHF wireless microphone. The amplifier will automatically pair the wireless UHF microphone, then they are working with each other. The connection between the microphone and the speaker may be disconnected. You should re-pair according to the pairing method.

For ensure better amplification, aim at the headset MIC capsule when speaking.

Please turn down the volume properly to avoid howling when you are using this device in a small room.

Function Illustration:

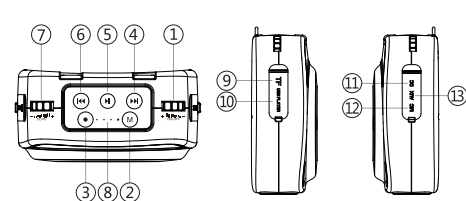

① Power switch & volume control: Rotate the knob to " ON " to turn on the amplifier, rotate to " + " continuously to increase the volume, rotate to " - " continuously to decrease the volume till turn off.

- Mode:** Short press it to switch to UHF mode / TF card play / USB flash drive play / AUX mode / Bluetooth mode.
- Recording**
Connect the microphone, make sure the USB flash disk or TF card has been inserted, long press " ● " key to record; short press " ● " key again to stop recording, it will automatically play the present recording files.The recording files will be saved automatically into the USB flash disk or TF card.

Play recording: Insert an USB flash drive or TF card with recording files , short press " ● " key to play in MP3 playing mode, it will play the latest recording. You could short press the " ⏪ " or " ⏩ " button to select the recording.

- Next:** Short press to play next song, long press to fast forward.
- Play/Pause:** Short press it to pause, and press again to play.
- Previous:** Short press to play previous song, long press to fast rewind.
- Microphone ECHO control:** Please turn the echo to the minimum volume when using the microphone for amplification.

- LED Indicator:**
 - Blue light flashing:** Bluetooth is waiting for connection.
 - Blue light stop flashing:** Bluetooth is connected.
 - Red light flashing one by one:** Charging.

⑨ TF card slot: Insert the TF card to play mp3. It is compatible with most brands, the maximum capacity is 32GB.

Note: It may be unreadable when the file is large or complex.

⑩ USB flash drive slot: Insert the USB flash drive to play mp3. It is compatible with most brands, the max capacity is 32GB.

Note: It may be unreadable when the file is large or complex.

⑪ DC 5V Charging Port: Please use the DC 5V charger.

⑫ Ø3.5mm Microphone Jack: Insert the wired microphone in any mode to amplify with current mode simultaneously. To avoid howling please do not point the microphone toward the speaker.

⑬ Audio input: Connect with the computer, phone, MP3 / MP4 and other AUX, short press " M " to switch to the AUX in mode that can play all above audio files directly.

TF/USB flash drive

The speaker will automatically play the music file after insert TF card / USB flash drive, and the previous song and the next song can be selected by short press the " ⏪ " or " ⏩ " button.

Loop: When play music on TF card / USB flash drive, long press " M " key for 3 seconds to switch to single song repeat. Long press it again to switch back to all repeat.

Notes: speaker will be " all repeat " by default after powered on next time.

Bluetooth Instruction

Please pair with your Bluetooth device as follows:

- Switch on the amplifier and press " M " to enter into Bluetooth mode. The Bluetooth mode is ready with voice prompt " Bluetooth is waiting for connection ", the blue light indicator will flashing fast.
- Turn on the Bluetooth function of your mobile phone and search " ZW-S93 ". Click and it will be connected success fully with a voice prompt " Bluetooth is connected ", the blue light indicator will stop flashing.

When playing music, please keep the amplifier close to the Bluetooth-enable device to maintain a stable connection.

Charging (voice amplifier):

- Please turn off the speaker when charging, and unplug the adapter in time after it is fully charged (the charging time is generally 3~5 hours).
- On top you will see a flashing red light when you are plugged into charger. Red light should be steady when fully charged. Please don't use it while charging.
- There are 3 red light battery indicators, the third red light indicator flash means low power, please charge it timely when the speaker reminds with voice prompt " Low battery, please charge " .
- Please charge the battery within 48 hours if the battery is too low. Keep the speaker with power if not use.

背面